

100W



Battery type	Ternary lithium battery
Battery capacity	225WH /20AH 11.1V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 100W (MAX 150W)
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 2A (MAX 3A)
Solar INPUT	12V-18V 5A/80W (MAX 6A 100W)
Package size	265*160*260 mm
weight	3.4KG +2 LED Light +5M Wire



150W



Battery type	Ternary lithium battery
Battery capacity	330WH /30AH 11.1V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 150W (MAX 200W)
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 2A (MAX 3A)
Solar INPUT	12V-18V 5A/80W (MAX 6A 100W)
Package size	265*160*260 mm
weight	3.7KG +2 LED Light +5M Wire



200W



Battery type	Ternary lithium battery
Battery capacity	330WH /30AH 11.1V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 200W (MAX 200W)
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 2A (MAX 3A)
Solar INPUT	12V-18V 5A/80W (MAX 6A 100W)
Package size	265*160*260 mm
weight	3.7KG +2 LED Light +5M Wire



300W



Battery type	Ternary lithium battery
Battery capacity	333WH /30AH 11.1V
Cycle life	2000 times (80% DOD, 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 300W (MAX 350W)
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
TYPE-C OUT	18W (MAX 3.8A/5V)
Solar INPUT	DC 12V-18V 20A/360W (MAX 400W)
AC INPUT	AC 100-260V /100W (MAX 150W)
Generator size	350*175*220 mm
weight	6KG



500W




Battery type	Ternary lithium battery
Battery capacity	721WH /65AH 11.1V
Cycle life	2000 times (80% DOD, 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 500W (MAX 540W)
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
TYPE-C OUT	18W (MAX 3.8A/5V)
Solar INPUT	DC 12V-18V 20A/360W (MAX 400W)
AC INPUT	AC 100-260V /100W (MAX 150W)
Generator size	350*175*220 mm
weight	9.5KG



600W



Battery type	Ternary lithium battery
Battery capacity	721WH /65AH 11.1V
Cycle life	2000 times (80% DOD, 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 600W (MAX 660W)
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
TYPE-C OUT	18W (MAX 3.8A/5V)
Solar INPUT	DC 12V-18V 20A/360W (MAX 400W)
AC INPUT	AC 100-260V /100W (MAX 150W)
Generator size	350*175*220 mm
weight	9.6KG

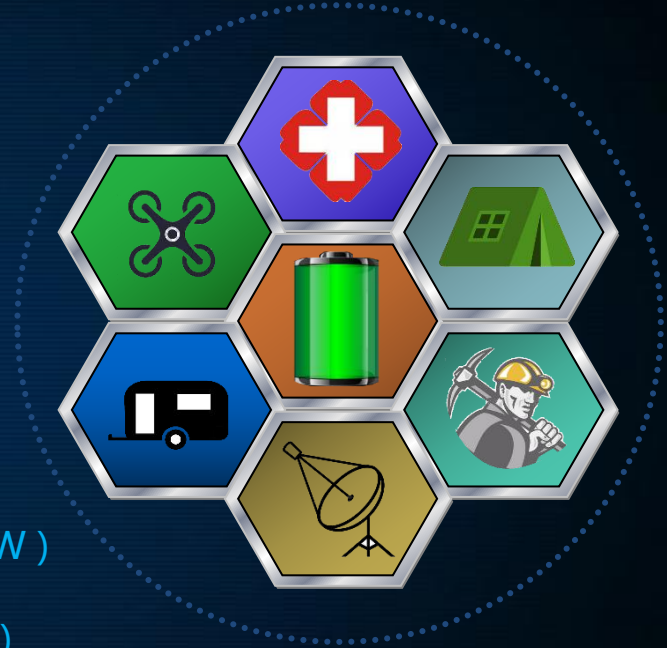

800W



Battery type	Ternary lithium battery
Battery capacity	721WH /65AH 11.1V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 800W (MAX 880W)
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
TYPE-C OUT	18W (MAX 3.8A/5V)
Solar INPUT	DC 12V-18V 20A/360W (MAX 400W)
AC INPUT	AC 100-260V /100W (MAX 150W)
Package size	350*175*220 mm
weight	9.6KG



1000W



Battery type	Ternary lithium battery
Battery capacity	1443WH /65AH 22.2V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 1000W (MAX 1080W)
DC OUTPUT	DC 12.5V 6A (MAX 7A)
USB OUPTUT	5V 3A (MAX 4A)
TYPE-C OUT	18W (MAX 3.8A/5V)
Solar INPUT	DC 30V-36V 40A/1200W (MAX 1400W)
AC INPUT	AC 100-260V /200W (MAX 250W)
Generator size	415*260*290 mm
weight	19KG



1500W



Battery type	Ternary lithium battery
Battery capacity	2109WH /95AH 22.2V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 1500W (MAX 1600W)
DC OUTPUT	DC 12.5V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
TYPE-C OUT	18W (MAX 3.8A/5V)
Solar INPUT	DC 30V-36V 40A/1200W (MAX 1400W)
AC INPUT	AC 100-260V /200W (MAX 250W)
Generator size	415*260*290 mm
weight	22KG



2000W



Battery type	Ternary lithium battery
Battery capacity	2109WH /95AH 22.2V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 2000W (MAX 2200W)
DC OUTPUT	DC 12.5V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
TYPE-C OUT	18W (MAX 3.8A/5V)
Solar INPUT	DC 30V-36V 40A/1200W (MAX 1400W)
AC INPUT	AC 100-260V /200W (MAX 250W)
Generator size	415*260*290 mm
weight	25KG



S3000W



Battery type	Ternary lithium battery
Battery capacity	2000WH /95AH 22.2V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 3000W (MAX 3200W)
DC OUTPUT	DC 12.5V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
Solar INPUT	DC 30V-36V 40A/1400W (PWM)
AC INPUT	AC 100-260V /1000W (MAX 1250W)
Generator size	900*500*580 mm
weight	42KG



3000W



Battery type	Ternary lithium battery
Battery capacity	2109WH /95AH 22.2V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 3000W (MAX 3200W)
DC OUTPUT	DC 12.5V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
Solar INPUT	DC 30V-36V 40A/1400W PWM)
AC INPUT	AC 100-260V /1000W (MAX 1250W)
Generator size	(H)840*(W)350*(L)600 mm
weight	42KG



S4000W



Battery type	Ternary lithium battery
Battery capacity	4218WH /95AH 44.4V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 4000W
DC OUTPUT	DC 12.5V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
Solar INPUT	DC 54V-72V 40A/2800W (PWM)
AC INPUT	AC 100-260V /1000W (MAX 1250W)
Generator size	900*500*580 mm
weight	58 KG



4000W




Battery type	Ternary lithium battery
Battery capacity	4218WH /95AH 44.4V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 4000W
DC OUTPUT	DC 12.5V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
Solar INPUT	DC 54V-72V 40A/2800W(PWM)
AC INPUT	AC 100-260V /1000W (MAX 1250W)
Generator size	(H)840*(W)350*(L)600 mm
weight	55KG



SHS-S5000W



Battery type	Ternary lithium battery
Battery capacity	4400WH /100AH 44.4V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 5000W
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
Solar INPUT	DC 54V-72V 40A/2000W (MAX 2800W)
AC INPUT	AC 100-260V /1000W (MAX 1250W)
Generator size	900*450*720 mm
weight	62KG

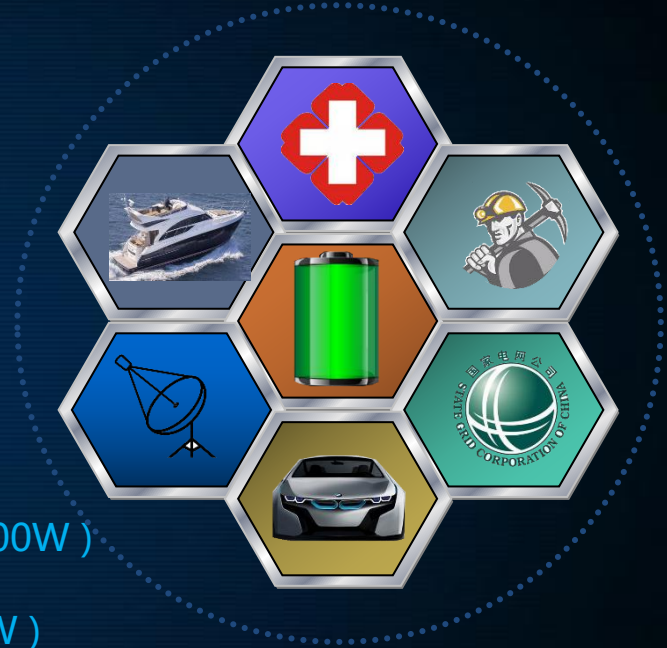

5000W



Battery type	Ternary lithium battery
Battery capacity	4218WH /95AH 44.4V
Cycle life	2000 times (80% DOD. 25 °C)
Storage period	Charge every three months
AC OUTPUT	AC 220/230V 5000W
DC OUTPUT	DC 12.5V-9.8V 6A (MAX 7A)
USB OUPUT	5V 3A (MAX 4A)
Solar INPUT	DC 54V-72V 40A/2000W (MAX 2800W)
AC INPUT	AC 100-260V /1000W (MAX 1250W)
Generator size	(H)840*(W)350*(L)600 mm
weight	62KG

